



## TM RANGE

High specification,  
lightweight, compact  
and easily manoeuvrable.



QUALITY THAT'S BUILT TO LAST

[WWW.ISEKI.CO.UK](http://WWW.ISEKI.CO.UK)

# THE VERSATILE RANGE OF TM TRACTORS



**Compact, high specification, lightweight and easily manoeuvrable in tight areas, the TM3217 and TM3267 range of tractors are ideally suited to glasshouses and horticultural settings where space is tight.**

**Alternatively natural and artificial sports turf areas, gardens and schools where high lift capacity is required to run numerous implements but the low ground pressure avoids damage to the turf.**

### Compact Dimensions

The compact dimensions of the TM, from 1.1m wide and 2.8m long, allow for easy storage in restricted areas like containers or small storage sheds.

Highly manoeuvrable for completing turf maintenance tasks in small areas such as tennis courts.

Whether you require the tractor for fine turf applications or to tackle farmland there is the option of Turf or Ag tyres as standard.





### Dashboard

Easy to read illuminated dashboard with rev counter, fuel gauge plus PTO controls and light switches.



### 3-point linkage

Highly capable lift capacity of up to 600kg or 800kg with the TM3267 when fitted with the optional high-capacity lift kit. Two rear double acting auxiliary valves (one with TM3217 manual) and controls located to the right-hand side of the operator for ease of operation with a large variety of implements.




### Operator controls

Mounted on both sides next to the operator and within easy reach for the ultimate control of the tractor and implements, producing an efficient and ergonomic working position. For enhanced safe use of the tractor all controls are colour coded:

- Orange = motion,**
- Yellow = PTO**
- Grey = hydraulic**

# POWER AND PERFORMANCE

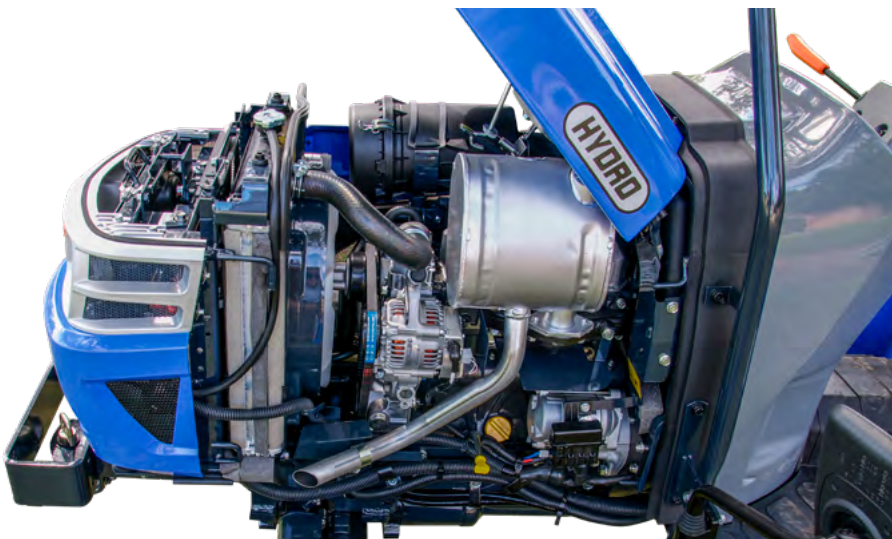

Powered by a reliable high capacity 1,123cc or 1,498cc three-cylinder diesel, water cooled engine. Available with Stage V Compliant 19hp or 25hp engines which offer efficient operation at low 2,600rpm for decreased noise levels, improved operator comfort and less wear on the engine.

### Simple Access for servicing and maintenance

Straight forward to open and close, the hinged bonnet with clip fit side panels and front cowl allows for excellent access to perform regular maintenance checks on the engine and service points.

## TM Range - COMPACT AND MANEUVRABLE



### LIGHTWEIGHT BUT POWERFUL

Where a powerful, high lift capacity compact tractor of up to 800kg is required, but you want to avoid damage to turf, whether it's artificial or natural, the TM's low total weight of 870kg and low ground pressure is ideal for delicate sports turf areas.

## OPERATOR COMFORT

Offering the ultimate operator comfort with the fully adjustable seat complete with armrests, plus ergonomically placed controls for a simple use. The ISO mounted operator platform reduces vibration, cutting down operator fatigue, allowing comfortable use of the machine for extended periods of time.



## Road Homologation



Road lighting, left and right rear-view mirrors and 7-pin trailer socket for road homologation are standard on all models for safe and legal highway use.



Standard 7 pin trailer socket.

# MANUAL VS HYDROSTATIC TRANSMISSION

The TM Range is available in both the versatile manual transmission and easy to use hydrostatic transmission.

Depending on the work that is planned for the tractor, this will determine which transmission type is more suitable for both the operator and the implements.

## Foldable ROPs



Assisted foldable ROPS which can drop down to allow for reduced space storage access.

## HYDROSTATIC TRANSMISSION

Ideal for when working with loaders or mowing where you are constantly changing speed and direction, the HST transmission allows for easy use and less fatigue on the operator due to the simple pedal forward and reverse control. It comes with three ranges to suit the demands along with 4WD and diff lock as standard on all models.

### Auto Throttle

You can control tractor speed and engine revolutions by depressing the HST pedal. For where a more consistent speed is required the Auto Throttle controls the engine revs, allowing for more fuel efficient use, whilst also making the tractor very easy to use.



## VERSATILE MANUAL TRANSMISSION



For total operator control, with synchronised forward and reverse shuttle, the manual transmission with 8 forward and 8 reverse gears is perfect for quick and easy changes whilst out working.

Perfect for running ground engaging pieces of equipment where a consistent speed is required.

## MID-MOUNT MOWER

Optional Mid-Mount Mower available in 54" rear, side and mulching decks plus a larger 60" side discharge mowing deck that can all be easily fitted.

Manufactured in high strength steel to ensure it's tough and durable, suitable for everyday use.



## HEIGHT OF CUT ADJUSTMENT

The height of cut can be adjusted from the operator's platform for ease of use when cutting various areas of grass negating the need to carry tools.



## MID AND REAR PTO

Both the TM3217 and TM3267 come with 540rpm rear and 2000 rpm mid PTOs as standard. The HST models have a independent PTO, allowing full control of the tractor speed whilst separately controlling the PTO. Additionally to this they have a soft start which reduces shocks to the PTO on engagement.



# GRASS CUTTING AND COLLECTION SYSTEM

Attached via the 3 point rear linkage the TM tractor range can also be fitted with a collector system to use in conjunction with a side discharge deck and hose kit.

With the option of low or high dump to suit the disposal facilities used the collector also has a large capacity of 550litre or 600litre with high tip for the option of a neat collected finish where required.



## LOADER

Available as an optional accessory the loader comes as standard with quick attach for the implements and built in demount stands allowing quick removal of the loader from the tractor. An optional third function is available for the operation of multi service and 4-in-1 buckets and muck grabs.

### Loader Attachments:

- Manure Forks
- Pallet Forks
- Twin Bale Spikes
- Multi Service Bucket
- Standard Bucket

# Turf or Ag Tyres?

Whether you require the tractor for fine turf applications or to tackle farmland there is the option of Turf or Ag tyres as standard.



# TM Range - Technical Specifications

MODEL	TM3217 HST	TM3267 HST
<b>ENGINE</b>		
Type	Diesel indirect injection, overhead valve	Diesel indirect injection, overhead valve
Displacement	1123cc	1498cc
No of cylinders	3	3
Power	14.3kW (19hp)	18.2kW (24.4hp)
Fuel Capacity	28ltr (7.4gal)	28ltr (7.4gal)
Rated engine speed	2600rpm	2500rpm
<b>TRANSMISSION</b>		
Type	HST	HST
Main clutch		
No of speeds	3	3
Forward	0-23.2kph (0-14.4mph)	0-24.4kph (0-15.2mph)
Driven Wheels	4WD	4WD
Differential Lock	Standard	Standard
<b>BRAKES</b>		
Type	Wet Discs	Wet Discs
<b>TYRES</b>		
Type	Turf or Ag	Turf or Ag
Front	6-12 (Ag) 24x8.50-12 (Turf)	6-12 (Ag) 24x8.50-12 (Turf)
Rear	9.5-16 (Ag)	9.5-18 (Ag)
<b>PTO</b>		
Rear PTO	1 Speed 540 @ 2475rpm	1 Speed 540 @ 2475rpm
Mid PTO	1 Speed 2000 @ 2461rpm	1 Speed 2000 @ 2461rpm
Shaft	1 3/8" 6-spline	1 3/8" 6-spline
<b>HYDRAULICS</b>		
Lift Capacity	600kg (1332lb)	600kg (1332lb) or 800kg (1764lb) with high capacity lift kit
Pump Capacity ltr/m	20.0	20.8
Position Control	Standard	Standard
Rear linkage type	Category 1	Category 1
<b>ROPS</b>		
Type	Rear foldable	Rear foldable
<b>DIMENSIONS</b>		
Length	2.815m (110.8")	2.88m (113.4")
Width	1.1m (43.7") (Ag) 1.295m (51") (Turf)	1.1m (43.7") (Ag) 1.295m (51") (Turf)
Height	2.42m (Ag) 2.39m (Turf)	2.42m (Ag) 2.39m (Turf)
Weight	835kg (1841lb)	870kg (1918lb)
Ground clearance	0.25m (9.8")	0.25m (9.8")



# TM Range - Technical Specifications

MODEL	TM3217 MECH	TM3267 MECH
<b>ENGINE</b>		
Type	Diesel indirect injection, overhead valve	Diesel indirect injection, overhead valve
Displacement	1123cc	1498cc
No of cylinders	3	3
Power	14.3kW (19hp)	18.2kW (24.4hp)
Fuel Capacity	28ltr (7.4gal)	28ltr (7.4gal)
Rated engine speed	2600rpm	2500rpm
<b>TRANSMISSION</b>		
Type	Mechanical	Mechanical
Main clutch	F8/R8	F8/R8
No of speeds	8	8
Forward	0-5-22.1kph (0-13.7mph)	0.5-24.4kph (0-15.2mph)
Driven Wheels	4WD	4WD
Differential Lock	Standard	Standard
<b>BRAKES</b>		
Type	Wet Discs	Wet Discs
<b>TYRES</b>		
Type	Turf or Ag	Turf or Ag
Front	6-12 (Ag) 24x8.50-12 (Turf)	6-12 (Ag) 24x8.50-12 (Turf)
Rear	9.5-16 (Ag) 315/75D-15 (Turf)	9.5-18 (Ag) 315/75D-15 (Turf)
<b>PTO</b>		
Rear PTO	1 Speed 540 @ 2475rpm	1 Speed 540 @ 2475rpm
Mid PTO	1 Speed 2000 @ 2461rpm	1 Speed 2000 @ 2461rpm
Shaft	1 3/8" 6-spline	1 3/8" 6-spline
<b>HYDRAULICS</b>		
Lift Capacity	600kg (1332lb)	600kg (1332lb) or 800kg (1764lb) with high capacity lift kit
Pump Capacity ltr/m	20.0	20.8
Position Control	Standard	Standard
Rear linkage type	Category 0	Category 1
<b>ROPS</b>		
Type	Rear foldable	Rear foldable
<b>DIMENSIONS</b>		
Length	2.815m (110.8")	2.88m (113.4")
Width	1.1m (43.7") (Ag) 1.295m (51") (Turf)	1.1m (43.7") (Ag) 1.295m (51") (Turf)
Height	2.42m (Ag) 2.39m (Turf)	2.42m (Ag) 2.39m (Turf)
Weight	835kg (1841lb)	870kg (1918lb)
Ground clearance	0.25m (9.8")	0.25m (9.8")

# TM3185

## Quality That's Built To Last

### Is your working environment tight on space?

The TM3185 is highly manoeuvrable with compact dimensions but still plenty of power.


**The TM3185 is ISEKI's most compact tractor with a 16hp engine, four wheel drive, power steering and compact dimensions, making it the ideal workhorse for restricted environments.**

**The tractor features low noise levels due to maximum power at low rpm. Its sturdy front and rear axles are built to cope with demanding situations. Four-wheel drive with differential lock and rear PTO. An optional front loader is available.**



# TM3185

## Technical Specifications

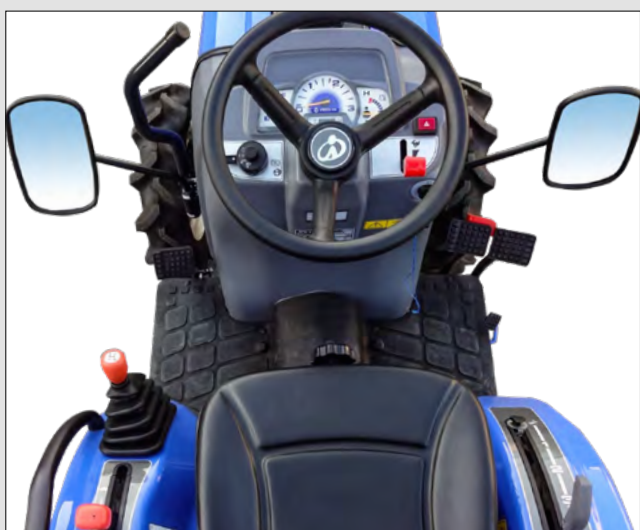

MODEL	TM3185
<b>ENGINE</b>	
Type	Diesel indirect injection, overhead valve
Displacement	761cc
No of cylinders	3
Power	11.8kw (16hp)
Fuel Capacity	14ltr (3.2gal)
Rated engine speed	2700rpm
<b>TRANSMISSION</b>	
Type	Mechanical
Main clutch	F6/R2
No of speeds	
Forward	1.2-20.1kph
Driven Wheels	4WD
Differential Lock	Standard
<b>BRAKES</b>	
Type	Wet Discs
<b>TYRES</b>	
Type	Turf or Ag
Front	5-12 (Ag) 20x8-10 (Turf)
Rear	9.5-16 (Ag) 212/80D-15 (Turf)
<b>PTO</b>	
Rear PTO	1 speed 540 @ 2500rpm
Mid PTO	N/A
Shaft	
<b>HYDRAULICS</b>	
Lift Capacity	540kg at ball ends, 280kg at 24"
Pump Capacity ltr/m	13.5
Position Control	Standard
Rear linkage type	Category 0
<b>ROPS</b>	
Type	Rear foldable
<b>DIMENSIONS</b>	
Length	2.46m
Width	1.27m
Height	2.28m
Weight	575kg
Ground clearance	



## TM RANGE

**Don't just take our word for it.**

Try an ISEKI tractor for yourself and book a demonstration with your local dealer.

**Contact us today  
01473 599266**



QUALITY THAT'S BUILT TO LAST

